PRODUCT DATA SHEET

MicroFLOW performance data cable RS232




ACCESSORY

7814.AA-0.10

Cable description


- Cable length: 90 cm
- Connector 1: D-SUB 9-pin female
- Connector 2: 3-pin IDC, 2.54 mm pitch
- Cable material: Molded PVC
- Shielded
- RS232 data cable for MicroFLOW sensors
- Signal connections: TxD, RxD and GND
- RoHS compliant
- Cable weight: 90 g

Pinout



Pin	Signal
2	TxD (transmit data output)
3	RxD (receive data output)
5	GND (Device ground supply)

Cable overview

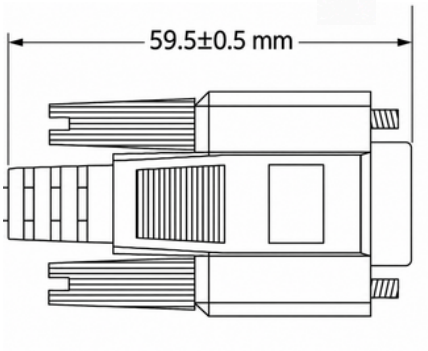

Disclaimer

All rights reserved. All information in this data sheet is based on latest knowledge, results of practical experience and tests carried out. Earlier specifications are hereby invalid. All specifications – technical included – are subject to change without notice. It is the customer's responsibility to ensure that the performance of the product is suitable for customer's specific application. No liability is accepted for indirect damage, in particular for the use or inability to use the product. Any liability we may have is limited to the value of the product itself.

PRODUCT DATA SHEET › Accessories > MicroFLOW performance data cable RS232 | © Micro-Hybrid-Electronic GmbH | 2026-10 | All rights reserved

GAS SENSORS

MH SHOP
shop.microhybrid.com

Online shop for IR components and sensors. Filter products simply by selecting the desired properties and request your quotation.